


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

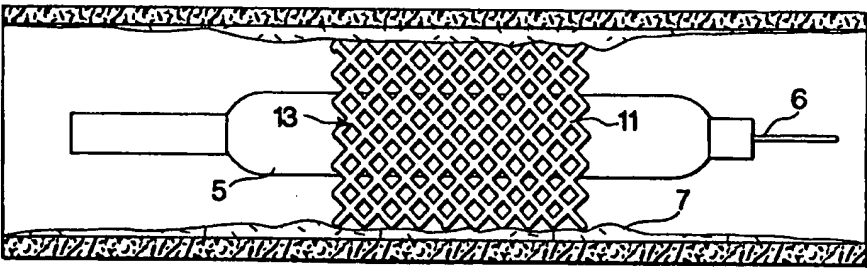

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 6 :</b> <b>A61F 2/06</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 96/40000</b> <b>(43) International Publication Date:</b> 19 December 1996 (19.12.96)
<b>(21) International Application Number:</b> PCT/US96/08891 <b>(22) International Filing Date:</b> 5 June 1996 (05.06.96)  <b>(30) Priority Data:</b> 08/477,759                      7 June 1995 (07.06.95)                      US  <b>(71) Applicant:</b> ANGIOMEDICS II INCORPORATED [US/US]; Suite 100, 2600 Fernbrook Lane, Plymouth, MN 55447 (US).  <b>(72) Inventors:</b> PORTER, Christopher, H.; 19756 N.E. 127th Place, Woodinville, WA 98072 (US). VAN TASSEL, Robert; 6420 Bayview Place, Excelsior, MN 55331 (US). AMPLATZ, Curtis; 546 North Lexington Parkway, St. Paul, MN 55104 (US). KASINKAS, Michael; 11700 26th Avenue, N., Plymouth, MN 55441 (US).  <b>(74) Agents:</b> REMILLARD, Jane, E. et al.; Lahive & Cockfield, 60 State Street, Boston, MA 02109 (US).		<b>(81) Designated States:</b> AU, CA, IL, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
<b>(54) Title:</b> CURABLE FIBER COMPOSITE STENT AND DELIVERY SYSTEM		
<b>(57) Abstract</b> <p>A stent for supporting a selected portion of a body lumen, comprising a fibrous material which is treated with a curable material to form a curable fiber composite. The fiber composite is positioned within a body lumen and, upon curing of the curable material, forms a rigid support structure.</p> 		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## CURABLE FIBER COMPOSITE STENT AND DELIVERY SYSTEM

### Background of the Invention

5

The present invention relates to an endoluminal stent for supporting a selected region of a body lumen and to a method of forming and delivering the stent *in situ*.

10 Atherosclerosis is commonly treated by means of angioplasty through the use of a balloon catheter. Balloon angioplasty involves passing a small, balloon-tipped catheter percutaneously into an artery or vessel and up to the region of obstruction. The balloon is then inflated to dilate the area of obstruction. However, restenosis or reclosure of the blood vessel following angioplasty is a common occurrence. Factors contributing, at least in part, to restenosis include proliferation of smooth muscle cells in the stenosed region and recoil of  
15 the arterial or vessel wall. When luminal narrowing occurs, further coronary difficulties can be experienced, including strokes, arrhythmia, infarcts and even death.

One approach to the prevention of restenosis following angioplasty has been to insert a supportive stent into the treated area. This can be done using a conventional balloon  
20 catheter. In particular, the stent is placed over the balloon portion of the catheter in a contracted or collapsed position. The catheter is then inserted into a blood vessel adjacent to a stenosis, and the balloon is expanded so that the stent engages and supports the surrounding vessel wall.

25 Typically, endovascular stents are made of metals to provide the requisite strength for maintaining dilation of a stenosed blood vessel region. For example, U.S. patent No. 5,197,978 (Hess et al.) and U.S. patent No. 5,354,308 (Simon et al.) disclose thermally deformable stents made of nickel and titanium. U.S. Patent No. 5,366,504 (Andersen et al.) discloses a stent made of loosely interlocked knitted loops containing metal wire.

30

Non-metallic stents have also been used for endovascular support. These devices are generally cylindrical structures made up of a sheet or sleeve of resilient, elastic material which can be cured or hardened following delivery of the stent to a selected region of a vessel. For example, U.S. Patent No. 5,100,429 (Sinofsky) discloses an endovascular stent  
35 having a tubular body formed as a rolled sheet of a biologically compatible material having a cross-linkable adhesive material between overlapping portions of the rolled sheet. U.S. Patent No. 5,344,201 (Cowan et al.) discloses an endovascular stent made up of an expandable sleeve containing a cross-linkable material which can be cured by exposure to radiation, and a film of biologically compatible material which encapsulates the sleeve.

U.S. Patent No. 5,344,444 (Glastra et al.) discloses a hollow expandable stent in the form of a ring, cylinder or sleeve containing a curable material. U.S. Patent No. 5,344,426 (Lau et al.) and U.S. Patent No. 5,306,286 (Stack et al.) disclose stents made of a flat sheet of material which is rolled up to form a cylinder and having a plurality of apertures. U.S. Patent No. 5,282,848 (Schmitt et al.) discloses a self-supporting stent having a continuous uniform surface made up of a woven synthetic material.

Many prior art stent designs suffer from the disadvantage of having a relatively large diameter in their non-deployed state, making them difficult to deliver and presenting the risk of causing undue trauma to the vessel. Additionally, prior art stents can be somewhat inflexible so that they fail to closely conform to the surrounding vessel wall when in place. Moreover, these stents often become a permanent part of the body and do not allow for significant tissue in-growth or exposure of the lumen wall to circulating blood when in place.

It is therefore an object of the present invention to provide a transformable stent for supporting and reinforcing a body lumen which is very flexible in its preformed state and tightly engages the surrounding lumen wall when expanded into place. It is also an object of the present invention to provide a stent which has a very low profile, so that it is easy to deliver and does not block a large portion of the lumen flow channel. It is a further object of the present invention to provide a stent which, following its delivery into a selected region of a body lumen, is extremely strong so as to effectively support and strengthen the surrounding lumen wall, yet which allows significant exposure of the supported lumen wall to circulating blood. It is still a further object of the invention to provide a polymer-based stent which is bio-resorbable and can be impregnated with a controlled release drug.

### **Summary of the Invention**

According to the present invention, these and other objects and advantages are achieved by a curable fiber composite stent which, upon formation *in situ* inside a selected region of a body lumen, serves to support the lumen without significant obstruction to blood flow. The stent is made up of a biocompatible fibrous material which is coated, impregnated, filled, or otherwise treated with a curable material so that the fiber composite can be suitably shaped to support a portion of a body lumen and then cured to maintain the shape. In one embodiment of the invention, the fiber composite and the curable material are bioresorbable so that the stent does not become a permanent part of the body.

The stent has an open, non-continuous structure, allowing for significant exposure of the lumen wall to circulating blood and for endothelial overgrowth. In one embodiment of

the invention, the stent has a helical conformation. In another embodiment, the stent comprises a number of fibrous strands which are braided to form a porous mesh. The fibrous strands are treated with a curable material, for example, by saturating the strands with a photoactivatable cross-linking agent. Alternatively, the strands can be hollow fibers which are filled with a curable material. The fiber composite can then be coated with a film of a biocompatible material which insulates the curable material-containing fiber composite from the lumen wall and circulating blood. Alternatively, the curable material can be microencapsulated and then contacted with the fibrous material, thereby forming a biocompatible curable fiber composite.

To deliver the fiber composite stent to a selected region of a body lumen, the stent is mounted on the head of a deflated balloon catheter while in a flexible, non-cured state, guided into place, and then expanded by inflation of the balloon so that the stent tightly presses against the surrounding lumen wall. The stent is then cured so that it forms a rigid support structure which closely conforms to the lumen wall. In a preferred embodiment of the invention, the curing is achieved by exposure of the stent to UV light which is delivered through the balloon via a fiber optic tip. Following curing of the stent, the balloon is deflated and removed, leaving behind a rigid stent.

The curable fiber composite stent of the invention can be used to widen and support any body lumen, including, but not limited to vascular, urological, biliary, esophageal, reproductive, endobronchial, gastrointestinal, and prostatic lumens. The stent can also be used to deliver therapeutic agents to cells of a lumen wall. In one embodiment of the invention, the therapeutic agent is incorporated into the stent so that it is pressed into the surrounding lumen wall upon expansion of the stent. In another embodiment of the invention, the therapeutic agent is photoreleasably linked to the surface of the stent so that, upon exposure to light, the agent is released from the stent surface onto the surrounding lumen wall. The stent of the invention can also be used to treat acute vascular occlusion, dissection of an artery, or sub-optimal angioplasty.

The present invention provides the advantage of an endovascular stent which has a relatively low profile so that it can be easily guided through a body lumen and does not substantially obstruct blood or air flow when in place. The stent is also very flexible upon delivery so that it tightly conforms to the surrounding wall when expanded into place. Once formed in place, the stent is strong so that it supports and strengthens the lumen wall.

### **Brief Description of the Drawings**

FIG. 1(a) shows a helical fiber composite stent coiled about a deflated balloon catheter, prior to being cured. Fig. 1(b) shows the helical stent in a fully cured state, positioned within a stenosed lumen.

FIG. 2 shows how the stent of Figs. 1(a) and 1(b) is positioned within a stenosed region of a lumen, expanded on the head of a balloon catheter, and irradiated to effect curing.

Fig. 3(a) shows a braided fiber composite stent placed lengthwise over the head of a deflated balloon catheter and positioned within a stenosed region of a body lumen. Fig. 3(b) shows the braided stent in an expanded state, following inflation of the balloon. Fig. 3(c) shows the braided stent in a fully cured state, supporting the lumen wall.

### **Detailed Description of the Invention**

In accordance with one embodiment of the present invention shown in Figs. 1(a) and 1(b), there is provided a stent 4 for supporting a selected region of a body lumen 7. The stent consists of a fibrous material which is treated with a curable material and then formed into a helix which engages the surrounding lumen wall 7. The stent is formed *in situ*, for example, within a stenosed region of a blood vessel, thereby reducing the risk of injury to the vessel wall resulting from delivery of a preformed stent.

The stent 4 is formed and delivered using a conventional balloon catheter, as shown in Fig. 2. Such catheters are well known in the art and generally include an elongated flexible tube 12 with an expandable balloon 5 attached at the distal end. The catheter also includes at least one optical fiber 8 for delivering radiation into the balloon 5. At its proximal end, the optical fiber is connected to a source of radiation 9, such as a laser. Suitable lasers for delivering radiation are described, for example, in U.S. Patent Application Serial No. 07/598,033, filed October 10, 1990, the disclosure of which is incorporated by reference herein. The optical fiber 8 extends through the catheter body 12 into the balloon 5 attached to the distal end. The tip of the fiber is preferably designed to diffuse light outwardly through the balloon, for example, by tapering the end or by using a diffusive radio-opaque material, as is well known in the art.

To form and deliver stent 4, a fibrous strand can be saturated or otherwise treated with a curable material, thereby forming a curable fiber composite. The fiber composite is then coiled about a cylindrical mandrel or similar device to form a helix. The helical fiber

composite is then mounted over the head of a deflated balloon catheter 5, as shown in Fig. 1(a), prior to being cured. The catheter is then advanced using guidewire 6 through a body lumen to selected area 7, such as an obstructed blood vessel. Once adjacent to the region, the balloon 5 is expanded, so that the flexible stent is pressed tightly against the surrounding lumen wall 7, as shown in Fig. 2. Radiation is then delivered into the balloon via the optical fiber(s) 8 or other energy conducting means, causing the curable material in the stent to cross-link or polymerize and form a rigid support structure which closely conforms to the surrounding lumen wall 7, as shown in Fig. 1(b). The balloon is then deflated and the catheter is removed.

In another embodiment of the invention, the stent is made up of a hollow fiber, such as a polyethylene terephthalate (PET) tube, which encapsulates a curable material. The filled fiber tubing can be mounted on a balloon catheter and delivered to a selected region of a body lumen as described in the first embodiment of the invention. However, because the curable material is encapsulated by the fiber composite, the risk of toxicity from the curable material is largely reduced.

In yet another embodiment of the invention shown in Figs. 3(a), (b), and (c), the stent 13 is made up of a number of fibrous strands 11 which are braided to form a porous mesh. In one example, approximately 16 strands of a fiber composite such as polyethylene terephthalate (Dacron), silk, or carbon are braided and then saturated with a UV curable material. To deliver stent 13 to a selected region of a body lumen, the flexible braid is pulled lengthwise over a deflated balloon catheter 5, as shown in Fig. 3(a). The stent is then guided through the lumen to the target site and expanded via balloon 5, as previously described in the first embodiment of the invention. Following expansion of the balloon, radiation is delivered into its interior via optical fiber 8, causing the braid to be cured while taking shape of the surrounding lumen wall 7, as shown in Fig. 3(b). Exposure to the light causes the curable material in contact with the fibers of the braid to stiffen the braid, resulting in a rigid, open mesh stent as shown in Fig. 3(c).

Fibrous materials suitable for use in the stent of the present invention include a variety of multi-filament fabrics and hollow fibers. The term "fibrous material", as used herein, encompasses all such fabrics and fibers including, for example, cotton, polyester, polyethylene terephthalate (Dacron), carbon and metal. The fibers making up the composite have a very small diameter and can freely move over one another, thereby providing flexibility when in an uncured state. However, upon bonding the fibers with a curable material by, for example, exposure to UV radiation, the fibers form a very strong, rigid support structure.

The fiber composite is formed into a rigid support structure by bonding the fibers with a material which can be cured by, for example, exposure to radiation, such as urethanes, polyurethane oligomer mixtures, acrylate monomers, aliphatic urethane acrylate oligomers, acrylamides, UV curable epoxies, and other UV curable monomers. Alternatively, the curable material can be a material capable of being chemically cured, such as silicone-based compounds which undergo room temperature vulcanization (RTV). Materials which harden over time can also be used, such as epoxies. The term "curable material", as used herein, is intended to include any material capable of being cross-linked or polymerized. In one embodiment, a UV curable polyurethane oligomer mixture, such as Dymax™ (available from Dymax Corp., Torrington, CT) is used and cross-linked using a Dymax™ UV curing machine, model PC-3. In another embodiment, UV polymerizable mixture of acrylate monomers, aliphatic urethane acrylate oligomers, and acrylamides, such as Loctite™ 3301 (available from Loctite Corp., Newington, CT) is used.

When using materials which are cured by exposure to radiation, the type and duration of radiation will vary according to the particular material used. While UV radiation is preferred, visible, infrared and thermal radiation can also be used to promote cross-linking of the fibers making up the stent. In a preferred embodiment of the invention, UV radiation having a wavelength ranging from 240-400 nm, is used which is provided by, for example, a non-coherent UV light source or an excimer source, such as a KrF excimer laser operating at 248 nanometers. Alternatively, a frequency-quadrupled, solid state, Neodymium-doped YAG laser or the like operating at 266 nm can be used, or an Argon ion laser operating at 257 or 275 or 360 nm can be used.

To reduce the risk of toxicity from the curable material prior to curing, the stent can further include a layer of a biocompatible material which encapsulates the curable fiber composite and serves as a barrier between the stent and any circulating blood, and between the stent and the lumen wall. Suitable biocompatible materials which can be used for this purpose include, but are not limited to, silicones, waxes, polyacrylamides, polyethylenes, polystyrenes, polypropylenes, polyolefins, polyurethanes and other thermoplastic elastic polymers. In one embodiment of the invention, a multifilament fiber (e.g., cotton or carbon) is saturated with UV curable material and then encapsulated within a polyethylene terephthalate (PET) shrink tubing.

The stent can also include a therapeutic agent which is incorporated into the fiber matrix of the stent, or into the biocompatible coating which encapsulates the stent, so that it can be released onto the cells of the surrounding lumen wall upon expansion and curing of the stent within a body lumen. For example, the therapeutic agent can be impregnated into the lumen wall by pressure from expansion of the stent. Alternatively, the therapeutic agent



can be photoreleasably linked to the surface of the stent so that, upon contact with the surrounding lumen wall, the agent is released onto the cells of the wall by exposure to radiation delivered via the optical fiber into the balloon.

5           Therapeutic agents which can be delivered via the stent of the invention include any agent or combination of agents that may affect the cells in the vessel wall, including drugs, chromophores, and nucleic acids. Therapeutic agents also include diagnostics which will aid in later treatment, such as radiopaque compounds that allow the vessel to be visualized by fluoroscopy or similar methods. Therapeutic agents may further include  
10 antimicrobial agents, such as antibacterial and antiviral agents.

For restenosis inhibition, it is typically desirable to arrest the proliferation of smooth muscle cells. Accordingly, drugs which prevent platelet aggregation and adhesion can be used, such as antiplatelets, antithrombogenics, and anticoagulants. In  
15 addition, receptor blockers, growth factors and other hormones may be used to limit the normal repair response. The following are groups of particular drugs which can be used to treat vascular disease, such as atherosclerosis and restenosis: anticoagulants, including heparin, hirudin, hirulog, tissue plasminogen activator, and fibrinogen; anti-inflammatory agents, such as steroids, ibuprofen, aspirin, somatostatin, angiopeptin, and  
20 anti-inflammatory peptide 2; cytotoxins, including colchicine, dexamethasone, doxorubicin, methotrexate, and psoralen; antibiotics; and enzymes and enzyme inhibitors, including urokinase, 2,4-dinitrophenol, and thiol protease inhibitor.

Another aspect of the present invention provides a curable fiber composite stent  
25 which is bioresorbable. For example, the fibrous component of the stent can be made of polyglycolic acid and other materials used in bioresorbable sutures. Due to the open, noncontinuous structure of the stent, which allows significant exposure of the lumen wall to circulating blood, the stent is encapsulated by endothelial tissue of the lumen wall by growth of the tissue over the fibers. The resulting layer of tissue further reinforces and supports the  
30 lumen. However, the stent will be absorbed before the encapsulating tissue thickens to an undesirable level.

### **Equivalents**

Those skilled in the art will be able to recognize, or be able to ascertain using no more  
35 than routine experimentation, numerous equivalents to the specific compositions and procedures described herein. Such equivalents are considered to be within the scope of this invention and are covered by the following claims.

What is claimed is:

1. A stent for supporting a selected portion of a body lumen, comprising at least one flexible fiber composite which is formed to engage the wall of a body lumen, wherein the  
5 fiber composite comprises a fibrous material which is treated with a curable material so that the stent can be positioned within the body lumen and, upon curing of the curable material, form a rigid support structure. .
2. The stent of claim 1, wherein the curable material is impregnated in the  
10 fibrous material.
3. The stent of claim 1, wherein the fibrous material comprises a hollow fiber which encapsulates the curable material.
- 15 4. The stent of claim 1, wherein the fiber composite is further contacted with a therapeutic agent.
5. The stent of claim 4, wherein the therapeutic agent is an antithrombogenic  
20 agent.
6. The stent of claim 1, wherein the fiber composite has a helical conformation.
7. The stent of claim 1, wherein the fiber composite comprises a plurality of  
25 strands which are braided to form a porous mesh.
8. The stent of claim 1, further comprising a layer of a biocompatible material which encapsulates the fiber composite.
9. The stent of claim 8, wherein the biocompatible material is selected from the  
30 group consisting of silicones, waxes, polyacrylamides, polyethylenes, polystyrenes, polypropylenes, polyolefins, and polyurethanes.
10. The stent of claim 8, wherein the biocompatible material further comprises a  
35 therapeutic agent.
11. The stent of claim 1, wherein the fiber composite is bioresorbable.

12. The stent of claim 1, wherein the fibrous material comprises a multifilament fabric selected from the group consisting of polyester, cotton, polyethylene terephthalate, and carbon.

5 13. The stent of claim 1, wherein the curable material is UV curable.

14. The stent of claim 13, wherein the curable material is selected from the group consisting of epoxies, silicones, urethanes, acrylamides, and polyurethane oligomer mixtures.

10 15. The stent of claim 1, wherein the curable material is thermally curable.

16. The stent of claim 1, wherein the curable material is chemically curable.

15 17. An apparatus for forming a stent inside a body lumen comprising:  
a flexible elongated tube having a light transmitting expandable balloon attached to its distal end;

at least one fiber composite disposed about the expandable balloon, the fiber composite containing a curable material;

means for inflating the balloon; and

20 energy conducting means for transmitting radiation from an outside source to the interior of the balloon, the radiation being of a sufficient energy to cause curing of the curable material, thereby rigidifying the fiber composite.

25 18. The apparatus of claim 17, wherein the energy conducting means is an optical fiber.

19. The apparatus of claim 17, wherein the radiation is UV radiation.

30 20. A method of forming a stent, comprising the steps of:  
applying a curable material to a fibrous material, thereby forming a curable fiber composite;  
shaping the fiber composite into a form suitable for insertion inside a body lumen;  
mounting the shaped fiber composite over an expandable member;  
disposing the expandable member in an unexpanded state inside a body lumen;  
35 locating the expandable member adjacent to a selected region of the body lumen;  
inflating the expandable member so as to bring the fiber composite into contact with the surrounding lumen wall; and  
curing the curable material so as to rigidify the fiber composite.

21. The method of claim 20, further comprising the step of coating the fiber composite with a biocompatible material.

5 22. The method of claim 20, further comprising the step of braiding the fiber composite to form a porous mesh.

23. The method of claim 20, further comprising the step of impregnating a therapeutic agent into the fiber composite.

10 24. The method of claim 20, wherein the step of curing the curable material comprises cross-linking or polymerizing the curable material by irradiation.

25. The method of claim 24, wherein the irradiation comprises UV radiation.

1/3

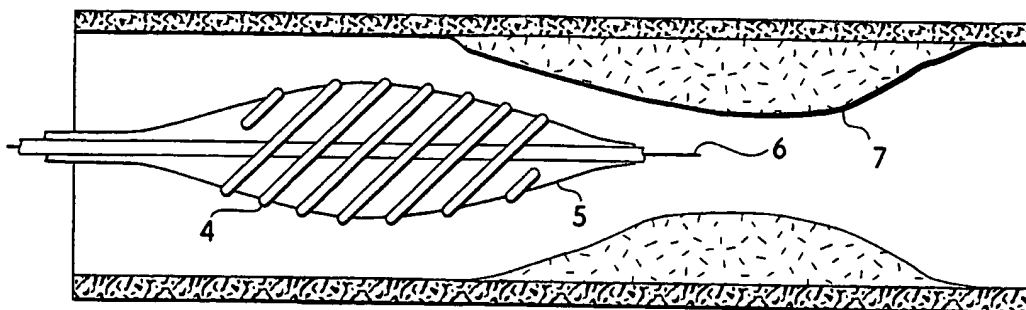


Fig. 1(a)

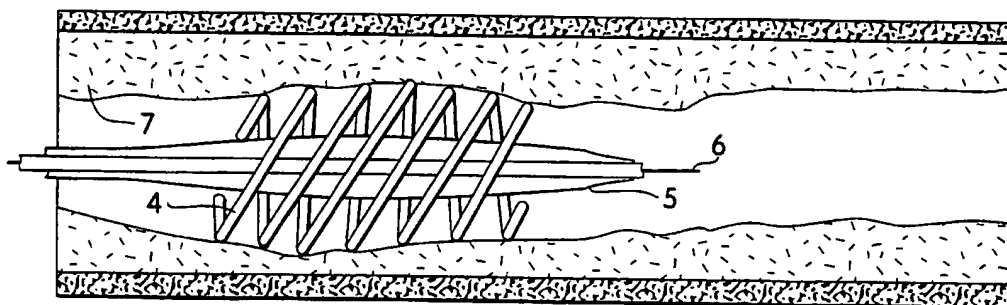


Fig. 1(b)

SUBSTITUTE SHEET (RULE 26)

2/3

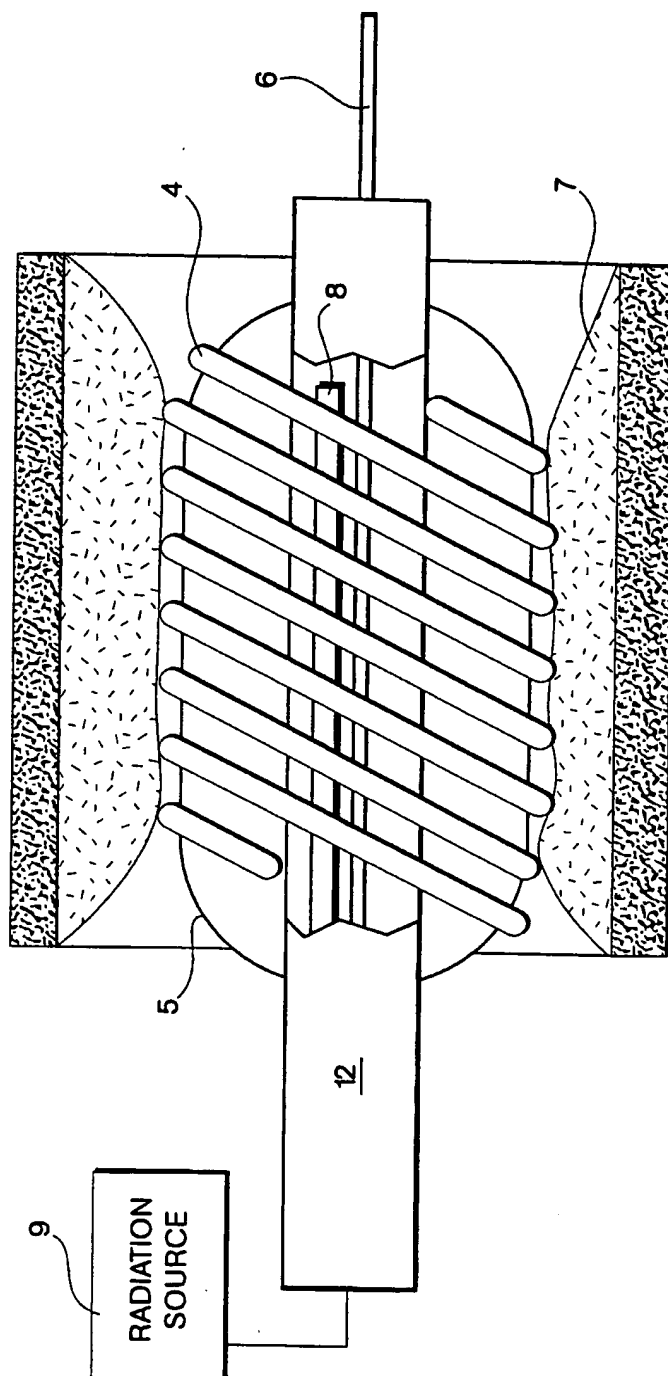


Fig. 2

3/3

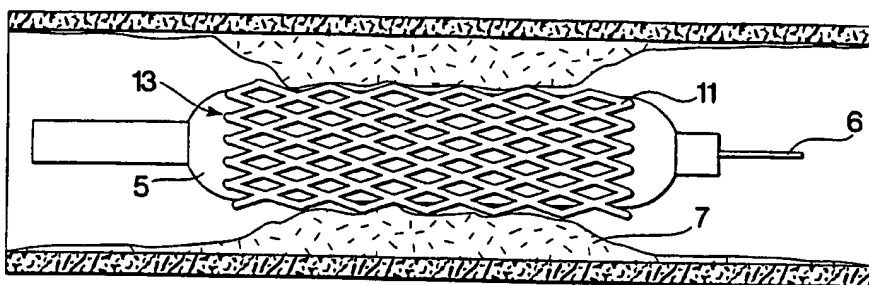


Fig. 3(a)

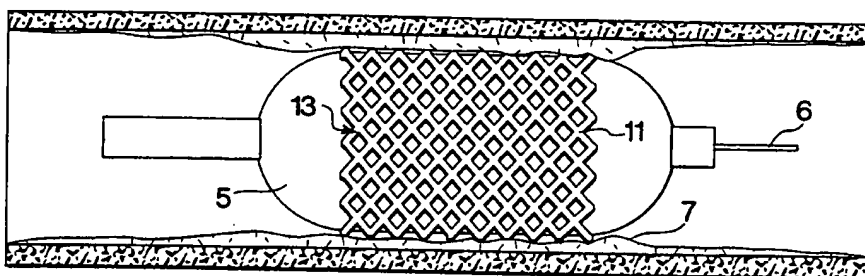


Fig. 3(b)

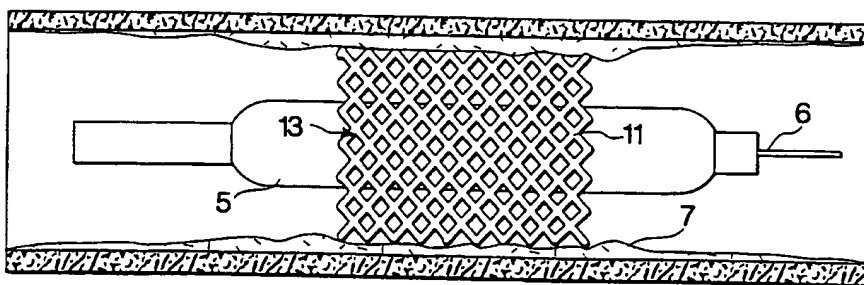


Fig. 3(c)

SUBSTITUTE SHEET (RULE 26)

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 96/08891

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 6 A61F2/06		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 6 A61F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP,A,0 617 930 (INDUSTRIAL RESEARCH B.V.) 5 October 1994 see column 2, line 31 - line 45 see column 5, line 33 - line 41; figures 1-4B,13A-13B	1-3,7, 13,14
Y	---	4-6, 8-12,15, 16
Y	US,A,5 334 201 (COWAN KEVIN P) 2 August 1994 see column 2, line 25 - line 42 see column 3, line 54 - line 58 see column 4, line 6 - line 12; figures 6-9	4,5, 8-10,12
A	---	13,14, 17-19
--- -/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.		
<input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents :		
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed		
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
Date of the actual completion of the international search  <div style="text-align: center;">25 October 1996</div>	Date of mailing of the international search report  <div style="text-align: center;">06. 11. 96</div>	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+ 31-70) 340-3016	Authorized officer  <div style="text-align: center;">Chabus, H</div>	



# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 96/08891

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP,A,0 649 637 (SLEPIAN MARVIN J) 26 April 1995 see column 8, line 12 - line 17 see column 12, line 19 - line 24 see column 13, line 19 - line 22; figure 7	6,11,15
X	---	17-19
Y	US,A,5 344 444 (GLASTRA HENDRIK) 6 September 1994 cited in the application see column 2, line 60 - line 67 see column 3, line 48 - line 63 see column 4, line 34 - line 50; figures 1,8,13	16
X A	-----	17-19 3,13

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 96/08891

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 20-25  
because they relate to subject matter not required to be searched by this Authority, namely:  
PCT Rule 39.1(iv) Method for treatm. of the human or animal body by surgery

2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/08891

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-617930	05-10-94	NL-A- 9300500 CA-A- 2115957 JP-A- 6296701 US-A- 5464419 US-A- 5529653	17-10-94 23-09-94 25-10-94 07-11-95 25-06-96
US-A-5334201	02-08-94	NONE	
EP-A-0649637	26-04-95	AT-T- 121954 AU-A- 4191989 CA-A- 1336755 DE-D- 68922497 DE-T- 68922497 EP-A- 0431046 JP-T- 4501670 WO-A- 9001969 US-A- 5213580	15-05-95 23-03-90 22-08-95 08-06-95 14-09-95 12-06-91 26-03-92 08-03-90 25-05-93
US-A-5344444	06-09-94	NL-A- 9101159 AT-T- 121923 CA-A,C 2072336 DE-D- 69202308 DE-T- 69202308 EP-A- 0521573 ES-T- 2072086 JP-A- 5184685	01-02-93 15-05-95 04-01-93 08-06-95 07-09-95 07-01-93 01-07-95 27-07-93